



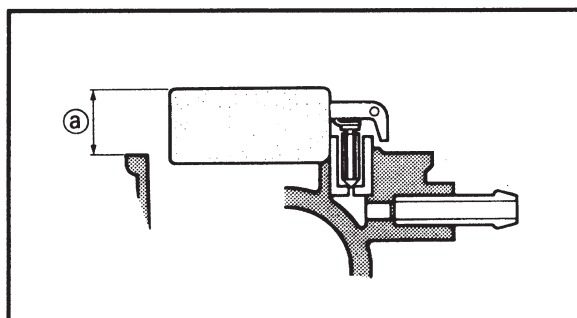

CARBURETOR

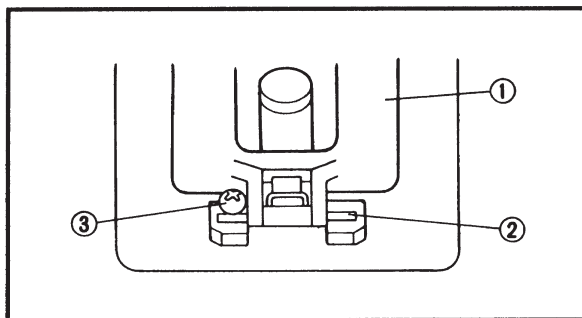

Carburetor assembly

NOTE:

Before assembling the carburetor, make sure to turn the pilot screw the same number of times, as noted before disassembly, from the seated position to its set position.

1. Install:

- Needle valve
- Float ①
- Float pin ②
- Screw ③

NOTE:

- The float pin should be fit in the slit the carburetor and locked with the screw.
- After installing, check the smooth movement of the float.

2. Measure:

- Float height ①
- Out of specification → Replace.



Float height ①:

$14.0 \pm 1.5 \text{ mm}$ ($0.55 \pm 0.06 \text{ in}$)

NOTE:

- The float should be resting on the needle valve, but not compressing the needle valve.
- Take measurement at the end surface of the float opposite to its pivoted side.