
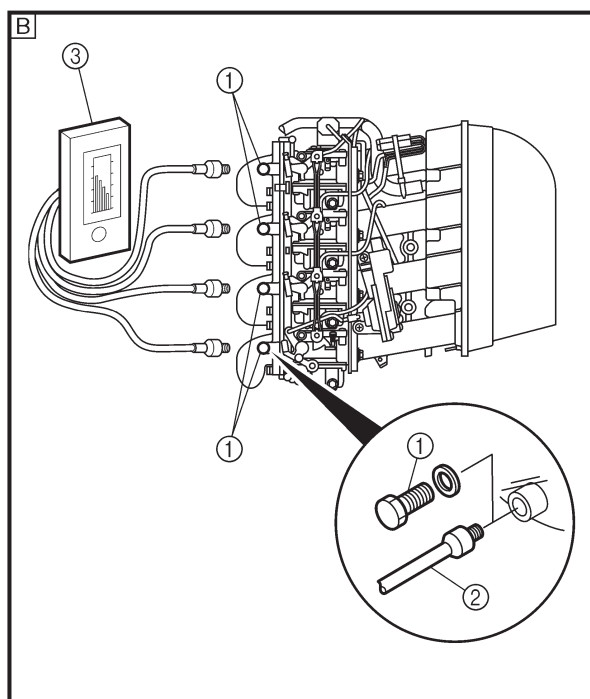
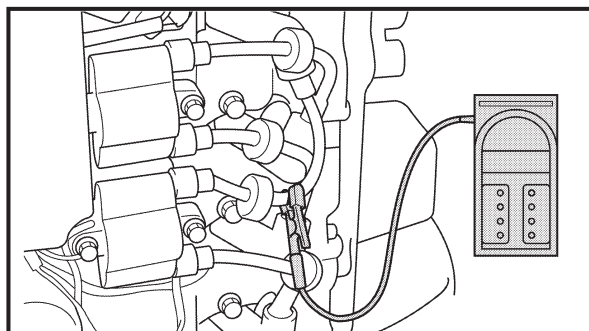


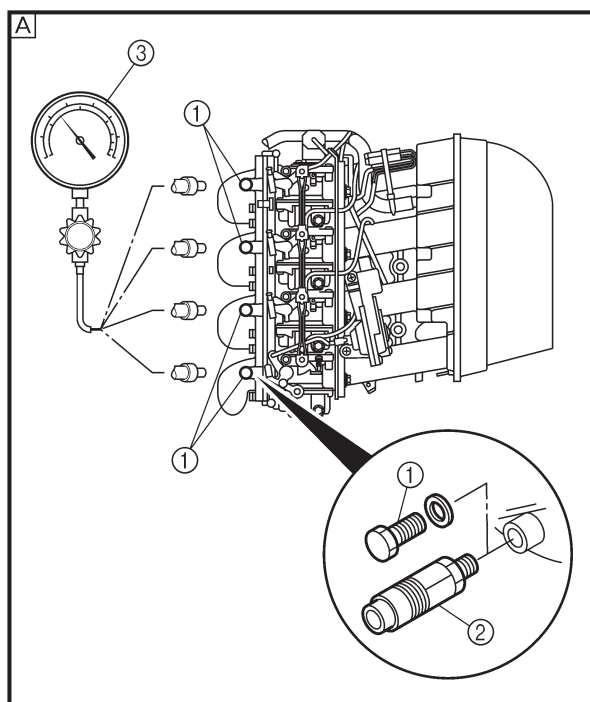

ASSEMBLING THE CARBURETOR

NOTE:

Before assembling the carburetor, make sure to turn the pilot screw the same number of times, as noted before disassembly, from the seated position to the set position.

SYNCHRONIZING THE CARBURETOR

CAUTION:

Do not adjust the carburetor when it is operating properly.

1. Check:

- Engine idling speed
Unstable → Adjust.

2. Adjust:

- Carburetor synchronization

Adjustment steps

- (1) Remove all of the plugs ①.
- (2) Install the adapters ② and vacuum gauge ③ onto the carburetor assembly as shown.



Vacuum gauge A
YU-08030

- (3) Start the engine and allow it to warm up for several minutes.
- (4) Install the tachometer onto the spark plug lead of cylinder #1.



Digital tachometer
YU-08036-B

NOTE:

For the best results, use a vacuum gauge with four adapters like the one shown in the illustration B.