




Carburetor Reassembly

1. Install the needle valve assembly onto the metal tab.
2. Install the float.

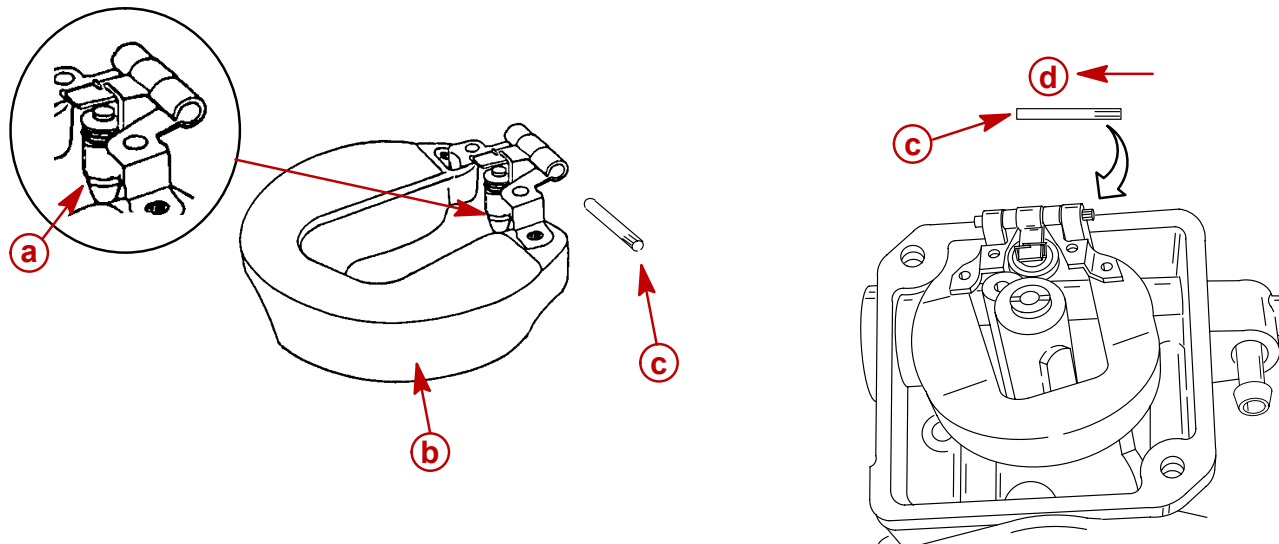

- a** - Inlet Needle Assembly
- b** - Float
- c** - Float Pin
- d** - Inserting Direction

3. Check the float lever using a carburetor scale. Adjust float level by bending the metal tab to which the inlet needle is installed.

Float Level
0.35 - 0.39 in. (9 - 10 mm)

